

Deck Edging, Fascia & Bullnose

Product specification sheet



Hand moulded
& coloured



Cold
Bending



High
slip-resistance



'Lost-head'
fixings



Wood free



Integrated
UV stabilisers



Natural
wood look




Easy to
install

Board Details

Board Type:	Dimensions: (T x W x L)	Allowable radius:	Weight:
Flexible Square Edge	32mm x 50mm x 2400mm	48" (at 65°F)	11.7 lb per board (5.3kg)
Flexible Bullnose Edge	32mm x 50mm x 2400mm	48" (at 65°F)	11.7 lb per board (5.3kg)
Bullnose Board	32mm x 150mm x 3600mm	Does not bend	20.5 lb per board (9.3kg)
Fascia Board	16mm x 146mm x 3600mm	48" (at 65°F)	13.5 lb per board (6.1kg)

Available colors:



Brushed Basalt

Square Edge MEUF24B
Bullnose Edge MEBF50B
Bullnose Board MEBB360B
Fascia Board MFN360B



Coppered Oak

Square Edge MEUF24C
Bullnose Edge MEBF50C
Bullnose Board MEBB360C
Fascia Board MFN360C




Driftwood/Smoked Oak

Square Edge MEUF24D
Bullnose Edge MEBF50D
Bullnose Board MEBB360D
Fascia Board MFN360D



Golden Oak

Square Edge MEUF24G
Bullnose Edge MEBF50G
Bullnose Board MEBB360G
Fascia Board MFN360G



Jarrah

Square Edge MEUF24J
Bullnose Edge MEBF50J
Bullnose Board MEBB360J
Fascia Board MFN360J



Limed Oak

Square Edge MEUF24L
Bullnose Edge MEBF50L
Bullnose Board MEBB360L
Fascia Board MFN360L



Vintage

Square Edge MEUF24V
Bullnose Edge MEBF50V
Bullnose Board MEBB360V
Fascia Board MFN360V



Antique Oak

Square Edge MEUF24A
Bullnose Edge MEBF50A
Bullnose Board MEBB360A
Fascia Board MFN360A



Ashwood

Square Edge MEUF24H
Bullnose Edge MEBF50H
Bullnose Board MEBB360H
Fascia Board MFN360H




Burnt Cedar/Embered

Square Edge MEUF24R
Bullnose Edge MEBF50R
Bullnose Board MEBB360R
Fascia Board MFN360R



Ebony Grey

Square Edge MEUF24Y
Bullnose Edge MEBF50Y
Bullnose Board MEBB360Y
Fascia Board MFN360Y



Flexible Square Edge



Flexible Bullnose Edge



Bullnose Board



Fascia Board

Working Specifications

Bullnose Boards and Fascia Boards should either be fully supported by the outer rim joists or supports at 12" centers, they should be installed with two Durafix screws every 12" centers.

The Flexible Edgings should be fully supported along their length by the perimeter joist, supported by a minimum of 1" at the back by the joist.


These profiles need to be screwed to the joist every 8-12" centers using Durafix screws.

When joining two Bullnose Boards or Fascia Boards on a straight run, they should be joined together on a 22.5° scarf joint so that one piece slides over the other. The outward facing cut should be painted with touch-up coating prior to being installed and should not be glued.

When joining two Flexible Edgings or Fascia Boards on a curve, they should be joined on a 45° angle and glued together prior to being fitted in place.

When mitering any of the Edging or Fascia boards for a corner, it is best practice where possible to cut the miter from the same board to account for natural variance in grain and sizing. All mitered corners must be glued together prior to fitting.

The Flexible Edging profiles can overhang the fascia by a maximum of 3/8", the Bullnose Boards can overhang the fascia by up to 1 1/2". The maximum size of cut-out for LED lighting under the Bullnose Board should be 3/4x3/8"mm and should be a minimum of 3/8"mm from the front of the board edge.

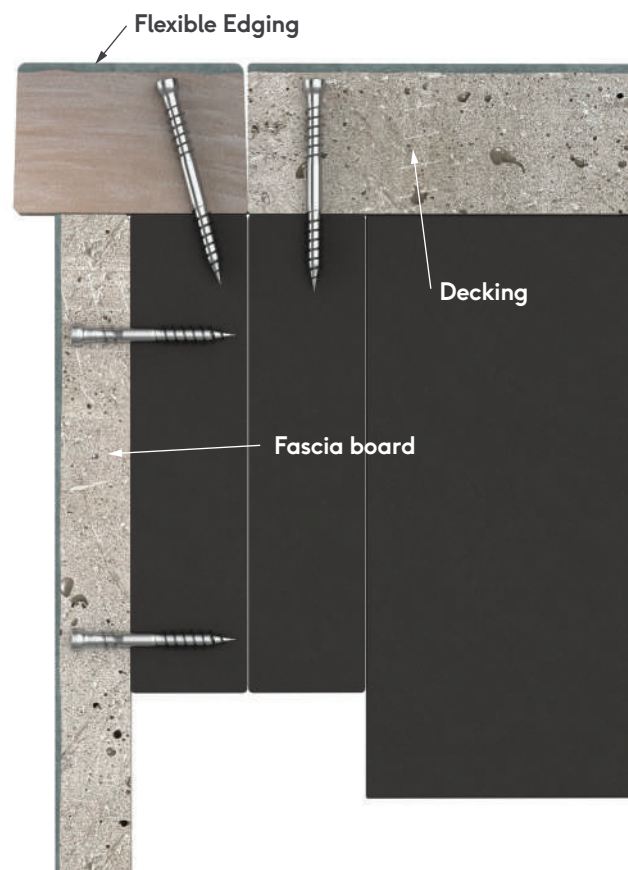

Tholin is reseller van Millboard. We werken hiervoor samen met ons netwerk van zorgvuldig gekozen partners: allemaal duurzame en innovatieve bedrijven met een oog voor detail. Natuur, mens en product komen in ons netwerk samen. We werken met partners door heel Nederland aan kwalitatief hoogstaande, eigentijdse en bovenal duurzame bouwprojecten.